

PURA 4 Water bath


PURA water baths stand for innovative, simple, and safe working in the laboratory. All models (except PURA 4) come with an integrated drain screw for quick and clean draining of the baths. PURA water baths are flexible and can be easily transported through ergonomic side recessed grips. Non-slip rubber feet ensure a firm footing and more safety in the laboratory.



Product features

- Easy operation
- Bright display
- Mains switch is protected against spray water
- Integrated protection against running dry
- Integrated drain screw (except PURA 4)
- No distracting elements in the bath
- Platform included as standard
- Integrated timer
- Non-slip rubber feet
- Ergonomic recessed grips
- Bright, white, easy to read display

Heat-up time

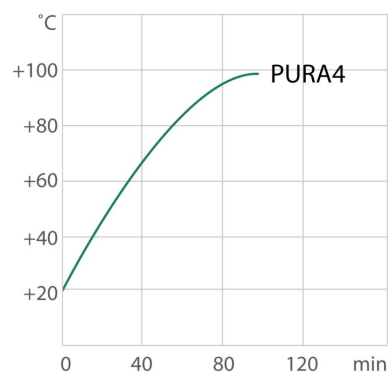

Medium: Water

Technical data

| Available voltage versions | | Cooling | |
|-----------------------------|--|--------------|-----------|
| Order No. | 9 550 504 | Cooling coil | accessory |
| Available voltage versions: | | | |
| 9550504.22 | 100-115V/50-60Hz (Nema N5-15 Plug) | | |
| 9550504.33 | 230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F) | | |
| 9550504.04 | 230V/50-60Hz (UK Plug Type BS1363A) | | |
| 9550504.05 | 230V/50-60Hz (CH Plug Type SEV 1011) | | |
| 9550504.33.chn | 230V/50-60Hz (CN Plug) | | |

| Bath | |
|------------------------------------|-----------------|
| Bath tank | Stainless steel |
| Bath cover | accessory |
| Usable bath opening cm (W x L / D) | 12 x 27 / 14 |

| Other | |
|----------------|------------------------|
| Classification | Classification I (NFL) |
| IP Code | IP 21 |

| Electronics | |
|------------------------|-----------------|
| Temperature display | LED |
| Temperature setting | Keypad |
| Electronic Timer h:min | 00:01 ... 99:59 |

| Waterbath | |
|---|--------------|
| Insert capacity for test tube racks 13 mm ø | 90 pc. |
| Insert capacity for test tube racks 17 mm ø | 60 pc. |
| Dimension with bathcover cm (W x L x H) | 21 x 37 x 36 |

| Dimensions and volumes | |
|---------------------------|--------------|
| Usable immersion depth cm | 14 |
| Weight kg | 4.9 |
| Dimensions cm (W x L x H) | 21 x 35 x 22 |
| Filling volume l | 0.8 ... 4.5 |

| Temperature values | |
|--|---------------|
| Setting the resolution of the temperature display °C | 0.1 |
| Working temperature range °C | +18 ... +99.9 |
| Temperature stability °C ¹ | ±0.15 |
| Ambient temperature °C | +5 ... +40 |
| Setting the resolution of the temperature display °C | 0.1 |
| ¹ Temperature stability with bath cover (accessories) | |

All Benefits



Ease of use.
The controls on the front side are easy to reach and use.



Brilliant.
Very bright display makes it easy to read even from a distance.



Tilting – no, thank you.
The PURA water bath design is tiltproof. Non-slip rubber feet prevent slipping and carrying handles simplify the transport.



Easy cleaning.
PURA does not incorporate any interfering functional elements. The smooth surfaces can be cleaned quickly and without residue.



Lightweight.
PURA water baths impress with their low weight and can be flexibly used.



Less is more.
Thanks to their design, PURA water baths require a minimum amount of water so that even small sample containers stand safely.



Start. Stopp. Timer.
PURA water baths offer an internal timer function. After expiration of the set time, a signal sounds and the device either continues operation or switches off.



100% Checked.
100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.



Green technology.
Development consistently applied environmentally friendly materials and technologies.



JULABO. Quality.
Highest standards of quality for a long product life.



Quick start.
Individual JULABO consultation and comprehensive manuals at your disposal.



Satisfied customers.
11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



Services 24/7.
Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at www.julabo.com.