

FROSTER LABEX® 96 PRO-ACTIVE

Explosion protection - Zone 2
The interior is free of ignition sources

Equipment

- 2 shelves
- Key switch
- Standalone or undercounter installation
- Door frame heater
- Rapid freezing cycle
- Digital temperature display
- Potential-free contact
- Visual and audible alarm signal
- Minimum/maximum temperature memory
- Low-noise compressor



**MADE IN
GERMANY**

PRO-ACTIVE-Features

- Faster response time in the event of impending faults thanks to proactive alarms
- Data recording can be read out via USB interface using a USB stick and software
- Minimisation of temperature deviations in the interior
- Maximum storage safety thanks to harmonised components





LABEX®-Devices

Our LABEX® models are the safest explosion-proof devices on the market that offer maximum temperature stability.

INTRINSIC SAFETY



Protected probes

The probes are protected via safety barriers



Explosion-proof fan

energy limiting power supply



CONSTRUCTIVE SAFETY



Earthing concept

The user is grounded as soon as the door handle is touched. Static charge is discharged into the housing



No spark formation

caused by moving parts (shelves or conductive drawers)



Explosion protection

Our promise - your safety!



KIRSCH was the first company in the laboratory cooling sector to adapt to the new ATEX product directive 2014/34/EU.

The interior of the devices is tested for absence of ignition sources by TÜV SÜD in conformity with Directive ATEX 2014/34/EU:

- All of the electrical equipment and components used in the interior (fans, temperature sensors, etc.) are specifically designed for use in zone 1* and zone 2
- We also guarantee the maximum temperature stability in explosion-proof interiors
- Intrinsically safe supply to the temperature sensors in the interior
- Explosion-proof fan
- Special earthing concept for discharging electrical potential
- Plastic parts in the interior have an antistatic design

(depending on the model)

*LABEX 465

Liability according to ATEX operator- and product guidelines

According to the ATEX operating directive, the plant operator is responsible for the correct selection of the equipment. For the determination of the suitable EX zone (e.g. Zone 1, Zone 2), following explosion hazards, among other things, have to be taken into consideration: the explosiveness of the stored substances and the frequency of occurrence of an explosive atmosphere.





We will gladly assist you in selecting the correct explosion protected device and provide you with the technical report of the TÜV-SÜD. You will find the declaration of conformity on our website: kirsch-medical.com/certificates/explosion-proofness.



- **PRO-ACTIVE- Control:** Permanent, proactive monitoring of the performance data and alerts in the case of deviations – so that you can take countermeasures in good time before a fault threatens your chilled goods; world’s most accurate temperature control in refrigerated areas thanks to two standard PT-1000 sensors.
- **External housing** made from galvanised sheet steel (rust-proof), with white, anti-scratch powder coating. Length of the plug cable: approx. 2.8 m.
- **Adjustable feet** to compensate uneven floors.
- **Interior** made from impact-resistant, white plastic with moulded-in shelves.
- **Interior equipment** can be customised (surcharge may apply). See optional equipment.
- **Extra-thick energy saving insulation**, made from high-quality, compression-moulded and environmentally friendly material.
- **Lockable door** with easy-to-replace plastic magnetic seal frame.
- **Door hinge** on the right-hand side (by default, see illustration), or the left-hand side, can be retrofitted.
- **Manual defrosting.**
- **Removable condensation container.**
- **Key switch** protected control panel against tampering. Membrane keyboard with digital temperature display and minimum/maximum temperature memory. Control and display sensors protected by safety barriers.
- **Warning functions** with visual and audible alarm signal in the case of temperature deviations or other malfunctions.
- **Power failure alarm** (visual and audible alarm), the monitoring unit remains in operation for approx. 30 hours on battery power.
- **Alarms** can be forwarded using a potential-free contact (e.g., to a mobile phone with optional KIRSCH EVOLUTION CLOUD module or to a control centre).
- **Data documentation** can be read via USB interface with KIRSCH Datanet software.
- **Rapid freezing cycle** ensures that the goods to be cooled are frozen quickly.
- **Ventilation-enforced refrigerating machine**, hermetically sealed, energy saving, low-noise, easy to service. Inlet air and exhaust air flow through the ventilation slits at the front.
- **Door frame heater** prevents icing of the door.
- **Low-noise compressor** reduces noise.

Specification

Capacity	95 litres
Temperature setting	approx. -5 °C to -25 °C
Voltage	220 - 240 V, 50 Hz
Power consumption	119 watts
Normal consumption	1.36 kWh/24 h
Admissible ambient temperature	from +10 °C to +32 °C
Heat emission (max.)	159 watts
Exterior dimensions (including distance from wall)	w x d x h = 54 x 54 x 82 cm
Usable dimensions	w x d x h = 43 x 36 x 43 cm
Exterior dimensions with door open at 90°	w x d = 54 x 106 cm
Shelf size	w x d = 43 x 36 cm
Max. load shelf	25 kg
Weight	Net weight 50 kg, gross weight 59 kg
Temperature deviation without defrosting	+/-1.5°C
Noise emission	38 dB(A)

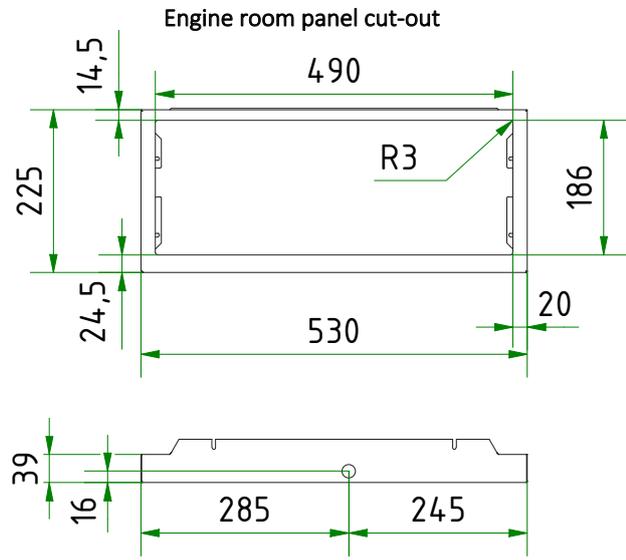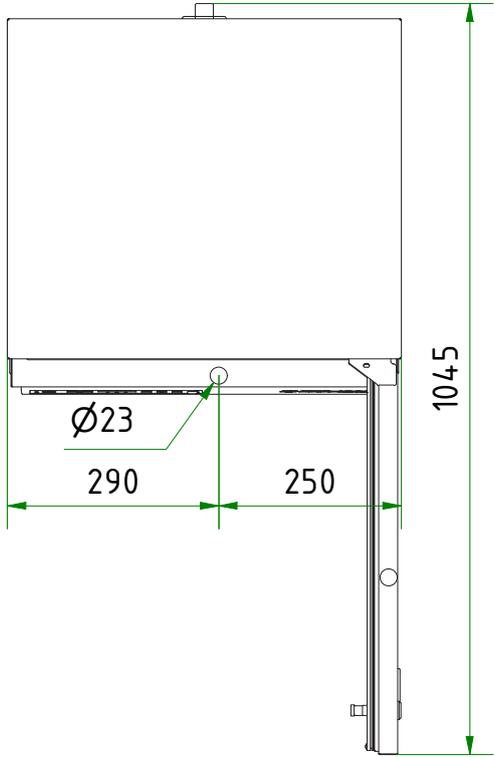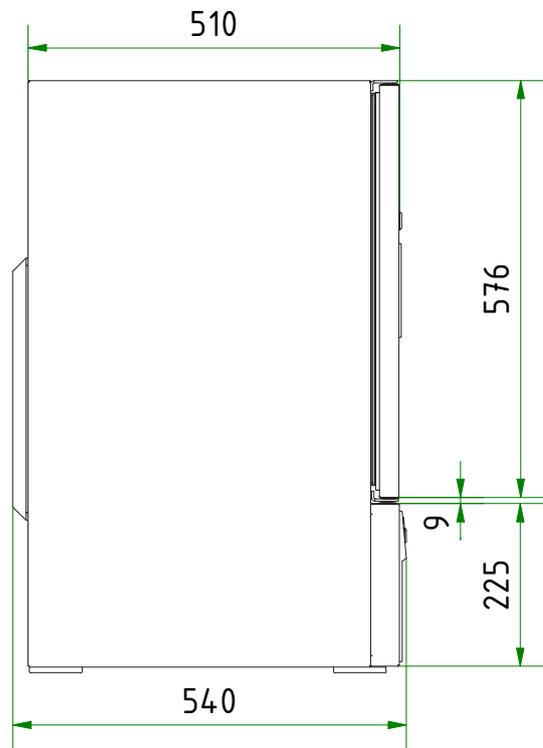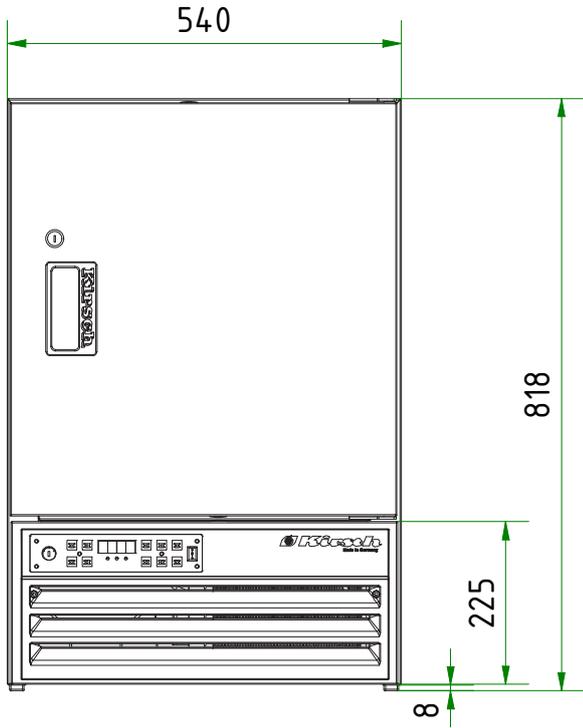



Optional equipment

KIRSCH refrigerators and freezers offer numerous equipment options that can be retrofitted.



Castors

for easy handling and moving around.



Decorative frame

Made of stainless steel, allows to cover door with a decorative panel (thickness max. 2 mm).



Door coupling

Connects the furniture door to the device door.



Additional length and cross dividers

for the optimum organisation of your refrigerated goods.



Access Port

Simple insertion of an external temperature sensor with integrated cable feed-through.



Additional Shelves

Wire shelves, robust with load capacity up to 40 and 50 kg.



Accessories for temperature documentation



PC-KIT-NET

Automatic temperature documentation and monitoring via your network (LAN connection).



KIRSCH EVOLUTION CLOUD-Module

Maximum storage safety through optimal connectivity and real-time monitoring.



External PT100/PT1000 with cold block

Additional temperature sensor for connection to existing/external monitoring system.



Circular blade temperature recorder

Depending on the model, it is either installed in the machine compartment panel of the refrigerator or freezer or integrated into an additional housing attachment.

* For more information about our cloud, please contact us.



Philipp Kirsch GmbH
Im Lossenfeld 14
77731 Willstätt
Germany

Phone: +49 (0) 781 9227-0
Telefax: +49 (0) 781 9227-200
info@kirsch-medical.com

www.kirsch-medical.com



Photograph this QR code and learn about our entire product range.