


# Model: CLASSIC pro L

## Reference no.: 29-200965-053

Correct use: passive storage

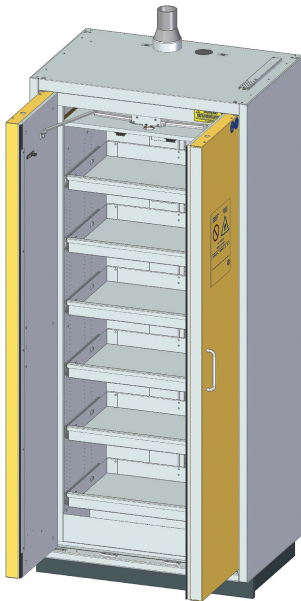

<b>Product group:</b>	safety storage cabinet
<b>Fire resistance (FR):</b>	Type 90
<b>Catalogue page:</b>	52
<b>Doors can be opened with minimum effort, design:</b>	wing door
<b>Door technology:</b>	one-hand
<b>In case of fire, automatic and blockage-free self-closing via thermocouple:</b>	yes
<b>Access control with cylinder lock:</b>	✓
<b>Enhanced ventilation concept - ventilation in every cabinet level:</b>	✓
<b>Visual inspection of ventilation cut-off flaps:</b>	✓
<b>Outer width [mm]:</b>	894 - (35.20 inch)

<b>Outer depth [mm]:</b>	612 - (24.09 inch)
<b>Outer height [mm]:</b>	2085 - (82.09 inch)
<b>Base height [mm]:</b>	85
<b>Easy transportation due to accessible base:</b>	✓
<b>Adjustable feet for level equalisation:</b>	✓
<b>Base version:</b>	ToeKick
<b>Material outer carcass:</b>	sheet steel, powder-coated
<b>Gross weight [kg]:</b>	407 - (897.28 lbs)
<b>Number of sides:</b>	1
<b>Inner width [mm]:</b>	679 - (26.73 inch)
<b>Inner depth [mm]:</b>	469 - (18.46 inch)
<b>Inner height [mm]:</b>	1697 - (66.81 inch)
<b>Material inner carcass:</b>	decor panels
<b>Maximum volume of the largest individual container [l]:</b>	20 - (5.28 gal)
<b>Collection volume [l]:</b>	22 - (5.81 gal)
<b>Shelf type:</b>	pull-out shelf
<b>Number of storage shelves:</b>	6
<b>Bottom tray interior:</b>	bottom tray
<b>Number of bottom trays:</b>	1
<b>Earthing connection according to TRGS 727 available:</b>	1
<b>Number of earthing connections:</b>	2

<b>Exhaust air connection included:</b>	NW 75/110
<b>Standing surface material:</b>	sheet steel, powder-coated
<b>Load-bearing capacity per standing surface with uniformly distributed load [kg]:</b>	60 - (132.28 lbs)
<b>Adjustment height 1 left [mm]:</b>	271 - (10.67 inch)
<b>Adjustment height 2 left [mm]:</b>	255 - (10.04 inch)
<b>Adjustment height 3 [mm]:</b>	255 - (10.04 inch)
<b>Adjustment height 4 left [inch]:</b>	255 - (10.04 inch)
<b>Adjustment height 5 [mm]:</b>	255 - (10.04 inch)
<b>Adjustment height 6 [mm]:</b>	265 - (10.43 inch)
<b>Mark of approval by TÜV:</b>	GS mark
<b>Type-tested by recognised test institutes according to:</b>	DIN EN 14470-1
<b>TÜV-tested according to:</b>	DIN EN 14470-1, EK5/AK4 09-10
<b>Further TÜV testing (1):</b>	DIN EN 14727
<b>Further TÜV testing (2):</b>	TRGS 510 Annex 3
<b>Added value mark of approval by TÜV:</b>	High Quality
<b>Declaration of conformity:</b>	CE