


Model: CLASSIC pro XL

Reference no.: 29-201265-052

Correct use: passive storage

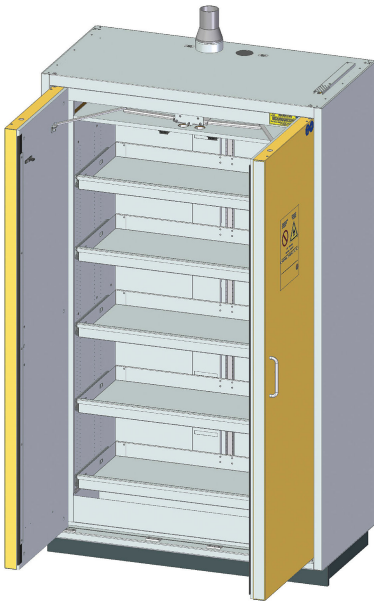

Product group:	safety storage cabinet
Fire resistance (FR):	Type 90
Catalogue page:	48
Doors can be opened with minimum effort, design:	wing door
Door technology:	one-hand
In case of fire, automatic and blockage-free self-closing via thermocouple:	yes
Access control with cylinder lock:	✓
Enhanced ventilation concept - ventilation in every cabinet level:	✓
Visual inspection of ventilation cut-off flaps:	✓
Outer width [mm]:	1194 - (47.01 inch)

Outer depth [mm]:	612 - (24.09 inch)
Outer height [mm]:	2085 - (82.09 inch)
Base height [mm]:	85
Easy transportation due to accessible base:	✓
Adjustable feet for level equalisation:	✓
Base version:	ToeKick
Material outer carcass:	sheet steel, powder-coated
Gross weight [kg]:	464 - (1022.94 lbs)
Number of sides:	1
Inner width [mm]:	979 - (38.54 inch)
Inner depth [mm]:	469 - (18.46 inch)
Inner height [mm]:	1697 - (66.81 inch)
Material inner carcass:	decor panels
Maximum volume of the largest individual container [l]:	30 - (7.93 gal)
Collection volume [l]:	33 - (8.72 gal)
Shelf type:	pull-out shelf
Number of storage shelves:	5
Bottom tray interior:	bottom tray
Number of bottom trays:	1
Earthing connection according to TRGS 727 available:	1
Number of earthing connections:	2

Exhaust air connection included:	NW 75/110
Standing surface material:	sheet steel, powder-coated
Load-bearing capacity per standing surface with uniformly distributed load [kg]:	60 - (132.28 lbs)
Adjustment height 1 left [mm]:	319 - (12.56 inch)
Adjustment height 2 left [mm]:	319 - (12.56 inch)
Adjustment height 3 [mm]:	319 - (12.56 inch)
Adjustment height 4 left [inch]:	303 - (11.93 inch)
Adjustment height 5 [mm]:	297 - (11.69 inch)
Mark of approval by TÜV:	GS mark
Type-tested by recognised test institutes according to:	DIN EN 14470-1
TÜV-tested according to:	DIN EN 14470-1, EK5/AK4 09-10
Further TÜV testing (1):	DIN EN 14727
Further TÜV testing (2):	TRGS 510 Annex 3
Added value mark of approval by TÜV:	High Quality
Declaration of conformity:	CE