


## Model: UTS ergo line XL

Reference no.: 29-061467-005

Correct use: passive storage

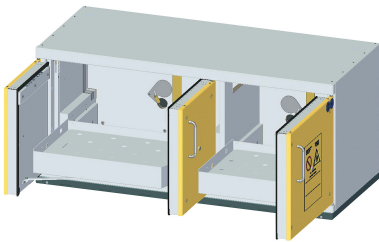

<b>Product group:</b>	safety storage cabinet
<b>Fire resistance (FR):</b>	Type 90
<b>Catalogue page:</b>	121
<b>Doors can be opened with minimum effort, design:</b>	wing door
<b>Door technology:</b>	classical
<b>In case of fire, automatic and blockage-free self-closing via thermocouple:</b>	yes
<b>Access control with cylinder lock:</b>	✓
<b>Enhanced ventilation concept - ventilation in every cabinet level:</b>	✓
<b>Visual inspection of ventilation cut-off flaps:</b>	✓
<b>Outer width [mm]:</b>	1400 - (55.12 inch)
<b>Outer depth [mm]:</b>	593 - (23.35 inch)
<b>Outer height [mm]:</b>	631 - (24.84 inch)
<b>Base height [mm]:</b>	35
<b>Base version:</b>	classical, with slots and floor extraction

<b>Material outer carcass:</b>	sheet steel, powder-coated
<b>Gross weight [kg]:</b>	232 - (511.47 lbs)
<b>Center partition wall:</b>	✓
<b>Number of sides:</b>	2
<b>Inner width [mm]:</b>	790 - (31.10 inch)
<b>Inner depth [mm]:</b>	463 - (18.23 inch)
<b>Inner height [mm]:</b>	480 - (18.90 inch)
<b>Material inner carcass:</b>	decor panels
<b>Maximum volume of largest individual container - left side [l]:</b>	15 - (3.96 gal)
<b>Maximum volume of largest individual container - right side [l]:</b>	10 - (2.64 gal)
<b>Collection volume - left side [l]:</b>	16.1 - (4.25 gal)
<b>Collection volume - right side [l]:</b>	11 - (2.91 gal)
<b>Shelf type:</b>	automatically extending pull-out tray
<b>Number of storage shelves:</b>	1
<b>Perforated sheet interior:</b>	perforated sheet insert
<b>Number of perforated sheet inserts:</b>	1
<b>Earthing connection according to TRGS 727 available:</b>	2
<b>Number of earthing connections:</b>	2
<b>Exhaust air connection included:</b>	NW 75
<b>Standing surface material:</b>	sheet steel, powder-coated

<b>Load-bearing capacity per standing surface with uniformly distributed load - left side [kg]:</b>	45 - (99.21 lbs)
<b>Load-bearing capacity per standing surface with uniformly distributed load - right side [kg]:</b>	45 - (99.21 lbs)
<b>Adjustment height 1 left [mm]:</b>	340 - (13.39 inch)
<b>Innenbreite [mm] 2:</b>	490 - (19.29 inch)
<b>Mark of approval by TÜV:</b>	GS mark
<b>Type-tested by recognised test institutes according to:</b>	DIN EN 14470-1
<b>TÜV-tested according to:</b>	DIN EN 14470-1, EK5/AK4 09-10
<b>Further TÜV testing (1):</b>	DIN EN 14727
<b>Further TÜV testing (2):</b>	TRGS 510 Annex 3
<b>Added value mark of approval by TÜV:</b>	High Quality
<b>Declaration of conformity:</b>	CE