



Model ACB-4E  
Available in 1.2 and 1.8 meter models (4' and 6').  
Shown with optional stand.


# OptiMAIR™

## Vertical Laminar Flow Cabinet

The World's Most Quiet and Safest Choice for Sample Protection Needs

### KEY BENEFITS:

- Sliding Sash with Ergonomic Handle
- ULPA Filter (ISO Class 3 Work Zone)
- Sentinel™ Silver Microprocessor Control System
- German-made ebm-papst® Centrifugal Motor
- Isocide™ Antimicrobial Powder Coating
- Stable and Self-compensating Airflow

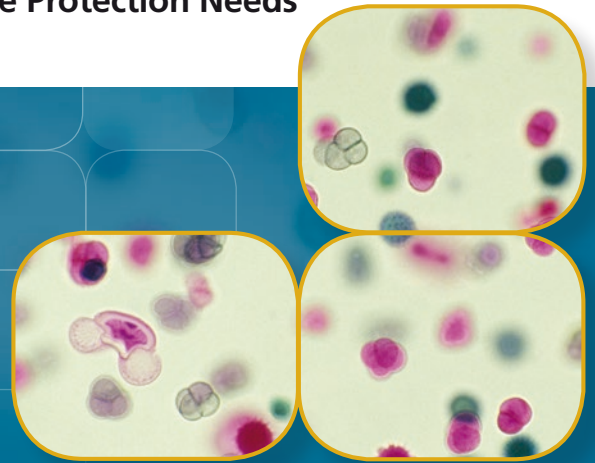

# OptiMair™ Vertical Laminar Flow Cabinet

Provides reliable protection of samples and work processes through the continuous supply of clean laminar air blowing across the work zone.




## High Performance Motor Fan

- German made ebm-papst® permanently lubricated motor fan.
- Provides a smooth, quiet, and vibration free operation.
- Compact design with completely integrated assembly which optimizes motor cooling.




## ULPA Filter

- 10x filtration efficiency with ISO class 3 work zone instead of industry-standard ISO class 5.
- Efficiency of >99.999% at particle size between 0.1 to 0.2 µm.

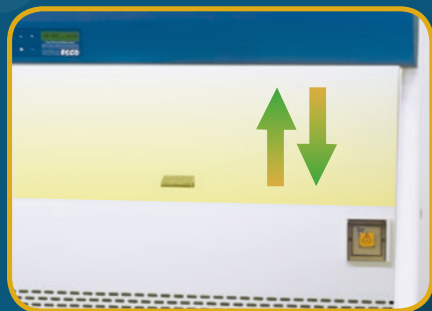

## Sliding Sash Window

- Sliding sash with ergonomic handle
- UV resistant tempered glass

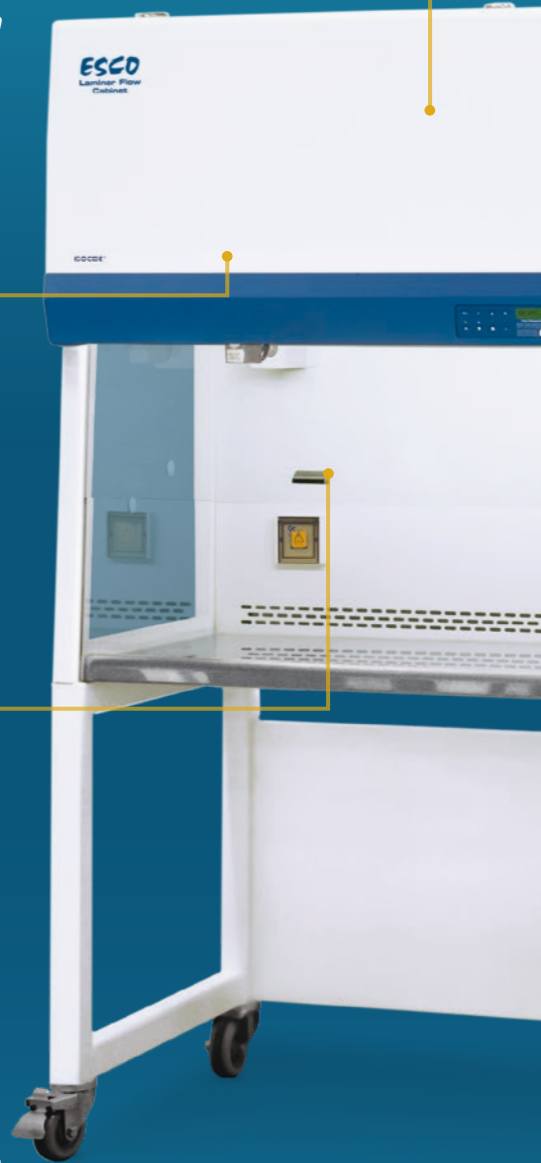

**Air Cleanliness Standards**  
(ISO 14644-1, Air Cleanliness Particle Limits  
(No. of Particles / m<sup>3</sup>))

Particle Size (µm)	Cleanliness Class					
	Class 1	Class 2	Class 3	Class 4	Class 5	Class 6
0.1	10	100	1000	10000	100000	1000000
0.2	2	24	237	2370	23700	237000
0.3	-	10	102	1020	10200	102000
0.5	-	4	35	352	3520	35200
1.0	-	-	8	83	835	8320
5.0	-	-	-	-	29	293

## Superior Air Cleanliness

All Esco laminar flow cabinets with ULPA filter provide ISO class 3 air cleanliness within the work zone per ISO 14644.1, significantly cleaner than the usual ISO class 5 on cabinets offered by the competition.

	Cabinet Performance	Air Quality	Filtration	Electrical Safety
Standards Compliance	IEST-RP-CC002.2, Worldwide	ISO 14644.1, Class 3, Worldwide AS 1386 Class 1.5, Australia JIS B9920, Class 3, Japan	EN-1822 (H14), Europe IEST-RP-CC001.3, Worldwide IEST-RP-CC007, Worldwide IEST-RP-CC034.1, Worldwide	IEC61010-1, Worldwide EN 61010-1, Europe UL61010-1, USA CAN/CSA-22.2, No.61010-1

## Sentinel™ Silver Microprocessor Controller

- Supervises all cabinet functions with large display monitor and operational parameters.
- Centered and angled down placement for easy reaching and viewing.



## AutoPurge™ Slots

- Eliminates air turbulence and possible dead air corners in the work zone giving more stability in the airflow.




## Work Top

- Raised at the front edge to contain any accidental liquid spills.



## ISOCIDE™ Antimicrobial Powder Coating


- Silver-ion impregnated powder coat
- Inhibit microbial growth to improve safety

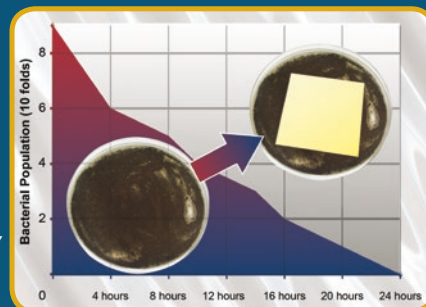

OptiMair™ Vertical Laminar Flow Cabinet  
Model: ACB-4E\_

## Guide to Models

ACB -							
1st Placeholder	2nd Placeholder	3rd Placeholder		4th Placeholder			
Product Line	Width	Control		Electrical			
OptiMair™	ACB	4 feet	4	Sentinel™ Silver	E	230 VAC, 50 Hz	1
		6 feet	6			115 VAC, 50/60 Hz	2
						230 VAC, 60 Hz	3

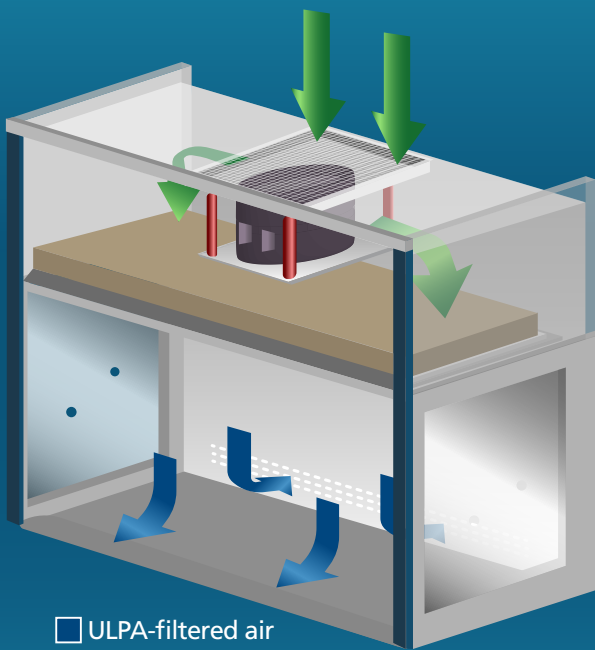


- ULPA-filtered air
- Room air / Inflow air

## Cabinet Filtration System

- Air is drawn from the top of the cabinet and will pass through the pre-filter. The ebm-papst® motor fan will then facilitate air movement towards the ULPA filter to produce a stream of clean laminar air within the work zone, diluting and flushing contaminants present in the interior. The purified air travels in a vertical, unidirectional stream across the front and back of the work-zone.
- work-zone.


A nominal filter face velocity of 0.30 m/s (60 fpm) ensures that there are enough air changes within the enclosed area of the cabinet to maintain cleanliness.

## OptiMair™ Vertical Laminar Flow Engineering Drawing

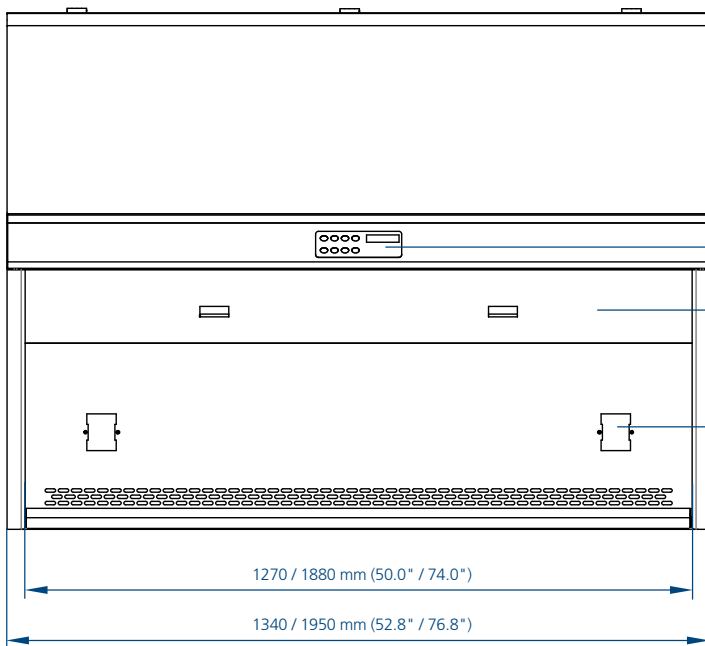

1. Sentinel™ Silver Microprocessor Controller
2. Tempered Glass Sliding Sash Window
3. Electrical Outlet

4. Pre-filter
5. Motor Fan
6. Electrical Panel

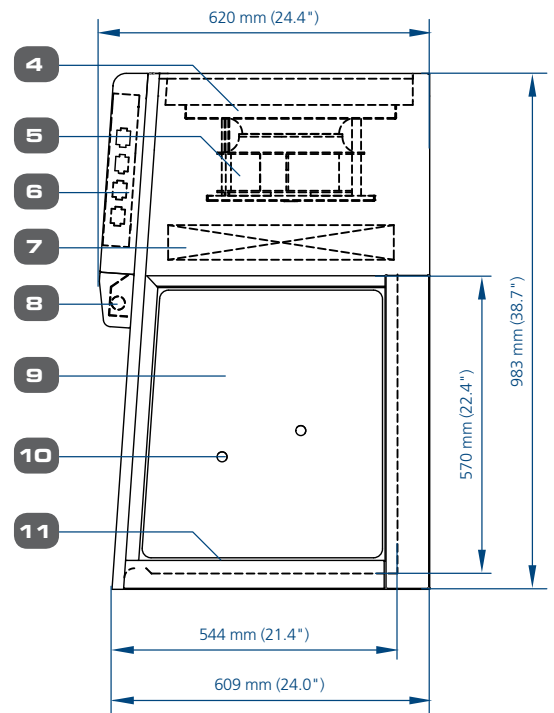

- 1
- 2
- 3

7. ULPA Filter
8. Fluorescent Lamp
9. Tempered Glass Side Wall

10. Service Fixture Retrofit Kit Provision
11. Stainless Steel Work Tray

## Applications

Microbiology (Non-pathogenic microorganisms)

Plant and Mammalian Cell Culture

Forensics

Biotechnology (e.g. PCR)

Compounding non-hazardous sterile products

Medical Device Industry

Semiconductor Assembly

## General Specifications, OptiMair™ Vertical Laminar Flow Cabinet

Model		ACB-4E_	ACB-6E_
Nominal Size		1.2 meter (4')	1.8 meters (6')
External Dimensions (W x D x H)	Without Base Stand	1340 x 620 x 983 mm (52.8" x 24.4" x 38.7")	1950 x 620 x 983 mm (76.8" x 24.4" x 38.7")
	With Optional Base Stand, 711 mm (28") type	1340 x 620 x 1694 mm (52.8" x 24.4" x 66.7")	1950 x 620 x 1694 mm (76.8" x 24.4" x 66.7")
Internal Work Area, Dimensions (W x D x H)		1270 x 524 x 570 mm (50.0" x 20.6" x 22.4")	1880 x 524 x 570 mm (74.0" x 20.6" x 22.4")
Usable Work Zone		0.67 m <sup>2</sup> (7.2 sq.ft.)	0.99 m <sup>2</sup> (10.7 sq.ft.)
Initial Airflow Velocity		0.3 m/s (60 fpm)	
Air Volume		566 m <sup>3</sup> /h (333 cfm)	850 m <sup>3</sup> /h (500 cfm)
ULPA Filter Typical Efficiency		>99.999% for particles size between 0.1 to 0.2 µm	
Sound Emission Per IEST-RP-CC002.2*		<61 dBA	<63 dBA
Fluorescent Lamp Intensity At Zero Ambient		>1000 Lux (74 foot candles)	
Cabinet Construction	Main Body	1.2 mm / 0.05" / 18 gauge electro-galvanized steel with white oven-baked epoxy powder-coated finish	
	Work Zone	1.2 mm (0.05") 18 gauge stainless steel, grade 304, 4B finish	
	Side Walls	Tempered glass	
Electrical Power Rating 1: 220-240 VAC, 50Hz, 1Ø	Cabinet Full Load Amps (FLA)	6.3 A	6.5 A
	Optional Outlets FLA	5 A	
	Cabinet Nominal Power	275 W	285 W
	Cabinet BTU	938	972
Electrical Power Rating 3: 220-240 VAC, 60Hz, 1Ø	Cabinet Full Load Amps (FLA)	1.3 A	1.6 A
	Optional Outlets FLA	5 A	
	Cabinet Nominal Power	198 W	
	Cabinet BTU	676	
Net Weight**		140 kg (308 lbs)	182 kg (400 lbs)
Shipping Weight**		178 kg (392 lbs)	231 kg (508 lbs)
Shipping Dimensions, Maximum (W x D x H)**		1430 x 749.5 x 1233 mm (56.3" x 29.5" x 48.5")	2110 x 749.5 x 1233 mm (83.1" x 29.5" x 48.5")
Shipping Volume, Maximum**		1.32 m <sup>3</sup> (46.6 cu.ft)	1.95 m <sup>3</sup> (68.9 cu.ft)

\*Noise reading in open field condition/ anechoic chamber.

\*\*Cabinet only; excludes optional stand.

## Accessories for OptiMair™ Vertical Laminar Flow Cabinet

Model	4 ft.	6 ft.
UV Lamp	UV-30A (5170255)	
Electrical Outlet	EO	
Support Stand with Caster Wheels	SPC-4E0 (5131346)	SPC-6E0 (5131347)
	SPC-4F0 (5131355)	SPC-6F0 (5131356)
Supports Stand with Levelling Feet	SAL-4E0 (5131349)	SAL-6E0 (5131350)
	SAL-4F0 (5131352)	SAL-6F0 (5131353)
Service Fixtures	SF-1G50 (5170015)	
	SF-IV50 (5170004)	
	SF-1N50 (5170012)	
	SF-1A50 (5170007)	
	SF-1W50 (5170009)	
	SF-2U50 (5170019)	
	CU-Pipe (5170026)	
IV Bar	IV-XXX-XXX (Specify model when ordering)	

*Note: 2 Universal (European/ American/ Japanese / Asia-Pacific) electrical outlets are standard on all OptiMair™ Cabinets.*




**UV Lamp**



**Service Fixture**



**Electrical Outlet**



**Stainless Steel IV Bar**



**Support Stand with Levelling Feet (28 and 34 in)**



**Support Stand with Caster Wheels**



providing

reliable product protection

and

energy-efficient technology



*Airstream® Gen 3  
Horizontal Laminar Flow Cabinet  
Model: LHG-4AG*



*Airstream® Gen 3  
Vertical Laminar Flow Cabinet  
Model: LVG-4AG*



*Airstream® Horizontal Laminar Flow Cabinet  
for Plant Tissue Culture  
Model: LHG-4DS*











*Enterprise® Laminar Flow Straddle Units,  
Model EQU106-ESUS*
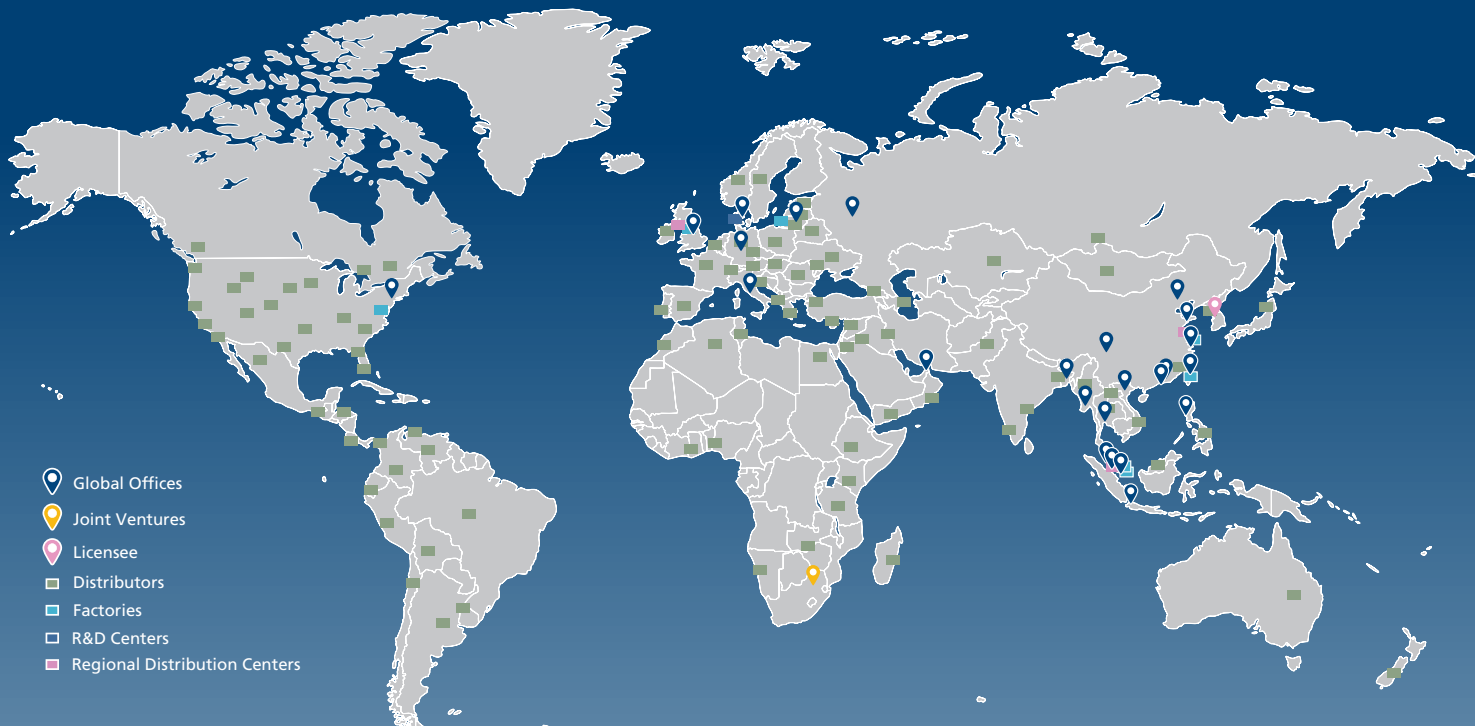
#Escogoesgreen

# ESCO GLOBAL NETWORK

42 LOCATIONS IN 21 COUNTRIES ALL OVER THE WORLD



-  Global Offices
-  Joint Ventures
-  Licensee
-  Distributors
-  Factories
-  R&D Centers
-  Regional Distribution Centers



**WORLD CLASS. WORLDWIDE.**

Esco Micro Pte. Ltd. • 21 Changi South Street 1 • Singapore 486 777  
 Tel +65 6542 0833 • Fax +65 6542 6920 • mail@escoglobal.com  
 www.escoglobal.com

Esco Technologies, Inc. • 903 Sheehy Drive, Suite F, Horsham, PA 19044, USA  
 Tel: +1 215-441-9661 • Fax 484-698-7757  
 eti.admin@escoglobal.com • www.escolifesciences.us

**Esco Global Offices:** Bangladesh | China | Denmark | Germany | Hong Kong | Indonesia | Italy | Lithuania | Malaysia | Myanmar | Philippines | Russia | Singapore | South Africa | South Korea | Taiwan | Thailand | UAE | UK | USA | Vietnam



9010024 Laminar Flow, ACB-E, AM, VE, 061520  
 Esco can accept no responsibility for possible errors in catalogues, brochures and other printed materials.  
 Esco reserves the right to alter its products and specifications without notice. All trademarks and logos in this material are the property of Esco and the respective companies.