Julabo


CORIO CD-B39 Heating circulator with stainless steel open bath

The open heating bath circulators of the new CORIO series feature highquality bath tanks made of stainless steel.

Product features

- Bright, white, easy to read display
- Very quiet
- easy switching between internal and external circulation
- USB connection
- High-quality bath tanks made of stainless steel
- For internal and external applications
- Integrated drain screw (except B5)
- Integrated pump connection M16×1
- Integrated drain screw



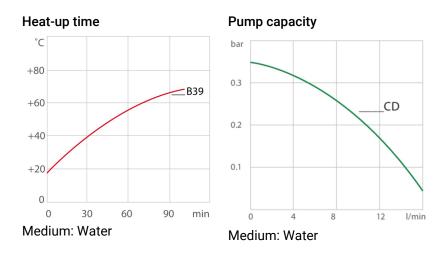

Technical data

Available voltage versions		Cooling	
Order No.	9 012 439	Cooling coil	accessory
Available voltage versions	5:		
9012439.01	100V/50-60Hz (Nema N5-15 Plug)		
9012439.02	115V/60Hz (Nema N5-15 Plug)		
9012439.03	230V/50Hz (Schuko Plug - CEE 7/4 Plug Type F)		
9012439.03.chn	230V/50Hz (CN Plug)		
9012439.04	230V/50Hz (UK Plug Type BS1363A)		
9012439.05	230V/50Hz (CH Plug Type SEV 1011)		
9012439.13	230V/60Hz (Nema N5-15 Plug)		
Bath		Other	
Bath tank	Stainless steel	Classification	Classification III (FL)

Julabo

Bath cover	accessory	IP Code	IP 21		
Usable bath opening cm (W x L / D)	33 x 30 / 30	Pump function	Pressure Pump		
		Pump type	Immersion Pump		
Electronics		Dimensions and volumes			
Interfaces	USB	Weight kg	18		
Temperature control	PID1	Barbed fittings inner diameter mm	8/12 mm		
Absolute temperature calibration	1 Point Calibration	Dimensions cm ($W \times L \times H$)	54 x 34 x 57		
Temperature display	LED	Filling volume l	35 41		
Temperature setting	Keypad	Pump connections	M16x1 male		
Temperature values		Included in delivery			
etting the resolution of the temperature 0.1 splay °C		2 Barbed fittings for tubing 8 and 12 mm ID. (Pump connections M16x1 male)			
Working temperature range °C	+20 +150				
Temperature stability °C	±0.03				
Ambient temperature °C ¹	. ,				
Setting the resolution of the temperature display °C	0.01 0.1				
¹ For applications near or below ambient ter	mperature: use a				

All Benefits



Brilliant.

Very bright display makes it easy to read even from a distance.



Switch on. And off you go. Intelligent operating concept. Ready for operation with just a few quick and easy steps.

All operating controls and safety functions are

accessed easily and comfortably from the front.



Timer. Integrated.

CORIO circulators include an integrated timer function. When the set time has elapsed, a signal sounds and the device switches off. Setting range: 0 ... 999 minutes.





Exact.

You can rely on it. PID1 control and 'Active Cooling Control' make the new CORIO precise and perfect.



Connection. Easy.







Locked in. The lockable power plug guarantees safe connection. More process safety.

Everything at the front.



Early warning system for low liquid level Maximum safety for applications, optical and audible alarm, allows user to refill bath fluid before the unit shuts down





100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.



ATC. Absolute Temperature Calibration, 1-point calibration (CD).



Internal. External.

The pump is controlled via a lever located directly below the display. Easily change between internal and external circulation.



Modern. Reliable.

High-grade components in every JULABO Circulator – platinum sensors, proven motor technology, CAN-Bus communication and much more.



Services 24/7.

Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at www.julabo.com.



Quick start.

Individual JULABO consultation and comprehensive manuals at your disposal.



Green technology.

Development consistently applied environmentally friendly materials and technologies.



JULABO. Quality.

Highest standards of quality for a long product life.

Satisfied customers.

11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.

Stable.

Rubber feet allow for a secured footing of your CORIO to prevent damage to your laboratory equipment.

