

CORIO CP-BC26 Heating circulator


CORIO circulators offer professional technology for high demands. With these devices, temperature control is optionally possible in the internal bath or in a connected external application.

Product features

- Models for internal and external applications
- Bright, white, easy to read display
- Very quiet
- easy switching between internal and external circulation
- powerful and infinitely adjustable pressure pump
- USB connection
- RS232 interface for online communication
- High-quality bath tanks made of stainless steel with bath lid and drain tap
- Integrated pump connection M16×1
- Integrated cooling coil for counter-cooling
- Easy operation



Pump capacity

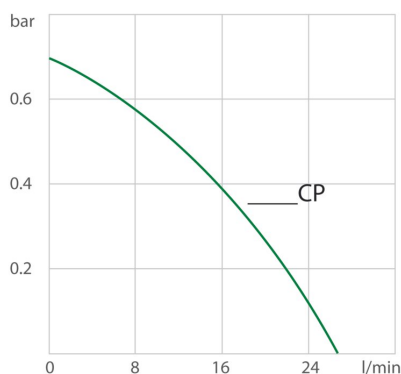

Medium: Water

Performance values

230V/50Hz (Schuko Plug - CEE 7/4 Plug Type F)	
Heating capacity kW	2
Viscosity max. cSt	50
Pump capacity flow rate l/min	8 ... 27
Pump capacity flow pressure bar	0.1 ... 0.7
Power consumption A	10

Technical data

Available voltage versions

Bath

Order No.	9 013 526	Bath tank	Stainless steel
Available voltage versions:		Bath cover	integrated
9013526.33	200-230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F)	Usable bath opening cm (W x L / D)	26 x 35 / 20
9013526.33.chn	200-230V/50-60Hz (CN Plug)		
9013526.04	200-230V/50-60Hz (UK Plug Type BS1363A)		
9013526.05	200-230V/50-60Hz (CH Plug Type SEV 1011)		
9013526.22	100-115V/50-60Hz (Nema N5-15 Plug)		

Other	
Classification	Classification III (FL)
Pump function	Pressure Pump
Pump type	Immersion Pump

Electronics	
Interfaces	RS232, USB
Temperature control	PID1
Absolute temperature calibration	3 Point Calibration
Temperature display	LED
Temperature setting	Keypad
Electronic Timer hr:min	0 ... 999

Dimensions and volumes	
Weight kg	19
Barbed fittings inner diameter	8/12 mm
Dimensions cm (W x L x H)	39 x 62 x 48
Filling volume l	19 ... 26
Pump connections	M16x1 male

Temperature values	
Setting the resolution of the temperature display °C	0.1
Working temperature range °C	+20 ... +200
Temperature stability °C	±0.02
Ambient temperature °C	+5 ... +40
Temperature display resolution °C	0.01 ... 0.1

Included in delivery

2 Barbed fittings for tubing 8 and 12 mm ID. (Pump connections M16x1 male)

For applications near or below ambient temperature: use a cooling coil or JULABO immersion cooler.

All Benefits



Brilliant.
Very bright display makes it easy to read even from a distance.



Switch on. And off you go.
Intelligent operating concept. Ready for operation with just a few quick and easy steps.



Timer. Integrated.
CORIO circulators include an integrated timer function. When the set time has elapsed, a signal sounds and the device switches off. Setting range: 0 ... 999 minutes.



Everything at the front.
All operating controls and safety functions are accessed easily and comfortably from the front.



Exact.
You can rely on it. PID1 control and 'Active Cooling Control' make the new CORIO precise and perfect.



Locked in.
The lockable power plug guarantees safe connection. More process safety.



Connection. Easy.
Inclined pump connections (M16×1) facilitate the connection of applications. Each unit includes 2 barbed fittings of 8/12 mm diameter each.




Powerful. Adjustable.
Strong pressure pump, continuously adjustable.



Early warning system for low liquid level.
Maximum safety for your application. Optical and audible alarm allows user to refill bath fluid in time.



Connectivity.
Remote control made easy. CORIO CP circulators feature a USB connection and RS232 interface.




Condensation protection.
Superb design solution. Integrated ventilation directs air over the bath lid and minimizes condensation.



Handle with ease.
Makes day-to-day work easy. Comfortably move your JULABO Circulator around by using the ergonomic handles (front and rear).



Internal. External.
The pump is controlled via a lever located directly below the display. Easily change between internal and external circulation.



Solid.
Minimized energy loss through high-quality insulation.



Stable.
Rubber feet allow for a secured footing of your CORIO to prevent damage to your laboratory equipment.



Tidy.
The special drain tap for easy draining of bath fluids without tools.



Touching permitted.
Optimum safety. The ergonomic plastic handle protects your fingers from hot surfaces.



100% Checked.
100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.




Green technology.
Development consistently applied environmentally friendly materials and technologies.



JULABO. Quality.
Highest standards of quality for a long product life.



Quick start.
Individual JULABO consultation and comprehensive manuals at your disposal.



Satisfied customers.
11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



Services 24/7.
Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at www.julabo.com.



Highest measuring accuracy
'Absolute Temperature Calibration' for manual compensation of a temperature difference, 3-point calibration