

## FLW1701 Recirculating Coolers for installation below a lab bench

The compact FL models are suited for a wide variety of cooling tasks. Installation under a lab bench saves valuable space. 2 variants: Air-cooled (FL) and water-cooled (FLW).

### Optional heating function


On request, we also offer our FL recirculating chillers with an additional integrated heating function and other special solutions. Our product experts will be happy to advise you individually in order to design a temperature control unit that is exactly right for your needs. Just give us a call!



### Product features

- Ergonomic design and easy operation
- Splash-proof keypad
- Large, bright LED display
- Reliable Microprocessor PID temperature control
- Powerful immersion pumps, suitable for continuous operation
- Permissible temperature in return line +80°C
- Easy filling and Drain tap easily accessible
- Low liquid level protection with optical and audible alarm signal
- Integrated stainless steel bath tanks
- Front drain
- No side vents, instruments can be placed right next to other equipment
- RS232 interface for PC connection
- IP class according to IEC 60529: 21
- Alarm output, potential-free change-over contact (max. 30 VA)

### Pump capacity

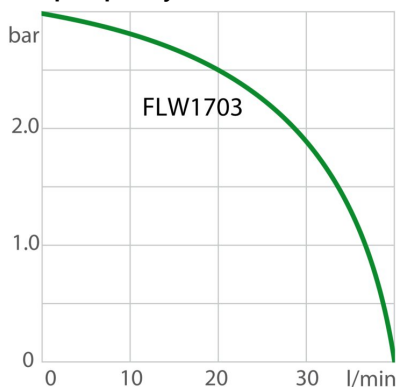

Medium: Water

## Performance values

### 230V/50Hz (Schuko Plug - CEE 7/4 Plug Type F)

Pump capacity flow rate l/min	23
Pump capacity flow pressure bar	1
Power consumption A	10

Order No.	9671017.03				
Cooling capacity (Ethanol)					
°C	20	10	0	-10	-20
kW <sup>1</sup>	1.7	1.5	1.1	0.85	0.4
Refrigerant stage 1					
Refrigerant	R452A				
Filling weight g	300				
Global Warming Potential for R452A	2140				
Carbon dioxide equivalent t	0.642				

<sup>1</sup> Performance specifications measured in accordance with DIN 12876. Cooling capacities up to 20 °C measured with ethanol; over 20 °C with thermal oil unless otherwise specified. Performance specifications apply at an ambient temperature of 20 °C. Performance values may differ with other bath fluids.

## Technical data

### Available voltage versions

Order No.	9 671 017
Available voltage versions:	
9671017.13	230V/60Hz (Schuko Plug - CEE 7/4 Plug Type F) (R404A)
9671017.02	115V/60Hz (Nema N5-15 Plug) (R404A)
9671017.03	230V/50Hz (Schuko Plug - CEE 7/4 Plug Type F) (R452A)
9671017.04	230V/3PPE/50Hz (UK Plug Type BS1363A) (R452A)

### Bath

Bath tank	Stainless steel
-----------	-----------------

### Electronics

Interfaces	RS232
Temperature control	PID1
Temperature display	LED
Temperature setting	Keypad

### Temperature values

### Cooling

Cooling of compressor	1-stage Water
Cooling water pressure max. bar	6
<b>Recommended cooling water properties</b>	
Cooling water temperature range °C	20
Cooling water difference pressure bar	2
Cooling water consumption l/min	2.8

### Other

Sound pressure level dbA	59
Classification	Classification I (NFL)
IP Code	IP 21
Pump type	Centrifugal Pump

### Dimensions and volumes

Weight kg	82
Cooling Water Connection in	G $\frac{3}{4}$
Barbed fittings inner diameter mm	8/12 mm
Dimensions cm (W x L x H)	50 x 76 x 64
Filling volume l	12 ... 17
Pump connections	M16x1 male

### Included in delivery

Setting the resolution of the temperature display °C	0.1
Return flow temperature max. °C	80
Working temperature range °C	-20 ... +40
Temperature stability °C	±0.5
Ambient temperature °C	+5 ... +40
Setting the resolution of the temperature display °C	0.1

2 Barbed fittings for tubing 8 and 12 mm ID. (Pump connections M16x1 male)

### All Benefits



**100% Checked.**  
100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.



**Green technology.**  
Development consistently applied environmentally friendly materials and technologies.



**JULABO. Quality.**  
Highest standards of quality for a long product life.



**Quick start.**  
Individual JULABO consultation and comprehensive manuals at your disposal.



**Satisfied customers.**  
11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



**Services 24/7.**  
Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at [www.julabo.com](http://www.julabo.com).



**Precise**  
PID Temperature control with set control parameters, temperature stability  $\pm 0.02 \dots \pm 0.2$  °C



**Connection of additional equipment**  
Stake connections for solenoid valve