

PRESTO W85 Process system

High cooling capacities enable extremely low temperatures down to -85 °C possible. The high heating capacity, particularly with the A85t and the W85t, provides even more flexibility in the application.


The highly dynamic temperature control systems PRESTO are designed for high-precision temperature control for a wide range of applications such as reactor vessels or material stress tests. Moreover, by using efficient components, the process systems can compensate exothermic and endothermic reactions exceptionally fast. Permanent internal monitoring and self-lubricating pumps ensure a long life-time. In addition, numerous interfaces offer many remote control possibilities across networks or for integration into higher-level control systems.




Product features

- Cooling capacity up to 2.8 kW
- External Pt100 sensor connection
- Connections for alarm-output, Pt100 external sensor and standby-input
- Analog connections, RS485, Profibus DP (accessory)
- Built-in 5.7" industrial color touchscreen
- Second external Pt100 sensor connection (accessory)
- Alarm output
- Heating capacity up to 15 kW
- Temperature stability ± 0.05 °C ... ± 0.1 °C
- Pump pressure up to 3 bar, max. flow rate 80 l/min


Cool-down time

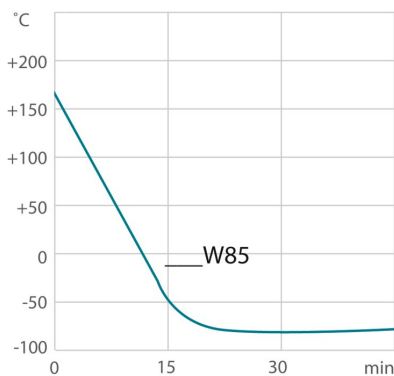

Pump capacity

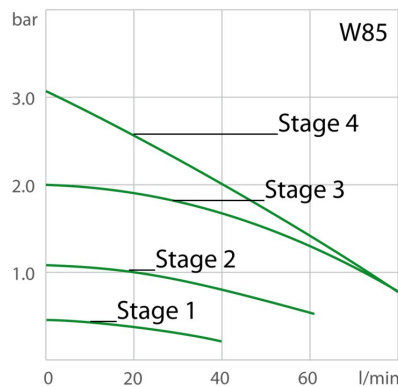

Heat-up time

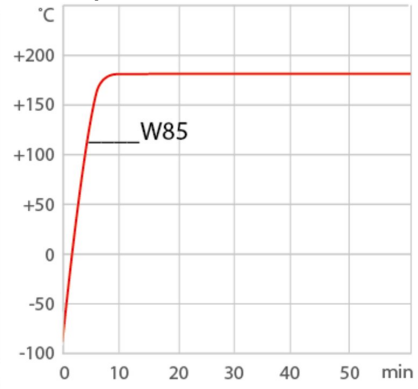

Medium: Thermal HL

Medium: Thermal HL



Performance values

400V/3PNPE/50Hz (Plug 32A CEE)	
Heating capacity kW	6
Viscosity max. cSt	50
Pump capacity flow rate l/min	0 ... 80
Pump capacity flow pressure bar	0.1 ... 3
Power consumption A	18

Refrigerant variants

Order No.		9421852.07					
Cooling capacity 1 (Ethanol)							
°C	20	0	-20	-30	-40	-60	-80
kW ¹	2.8	2.7	2.6	2.6	2.5	2.1	0.4
Refrigerant stage 1				Refrigerant stage 2			
Refrigerant	R507			Refrigerant	R23		
Filling weight g	900			Filling weight g	680		
Global Warming Potential for R507	3985			Global Warming Potential for R23	14800		
Carbon dioxide equivalent t	3.5865			Carbon dioxide equivalent t	10.064		

Order No.		9421852.S1.07					
Cooling capacity 1 (Ethanol)							
°C	20	0	-20	-30	-40	-60	-80
kW ¹	2.8	2.7	2.6	2.6	2.5	2.1	0.4
Refrigerant stage 1				Refrigerant stage 2			
Refrigerant	R449A			Refrigerant	R23		
Filling weight g	900			Filling weight g	680		
Global Warming Potential for R449A	1397			Global Warming Potential for R23	14800		
Carbon dioxide equivalent t	1.2573			Carbon dioxide equivalent t	10.064		

¹ Performance specifications measured in accordance with DIN 12876. Cooling capacities up to 20 °C measured with ethanol; over 20 °C with thermal oil unless otherwise specified. Performance specifications apply at an ambient temperature of 20 °C. Performance values may differ with other bath fluids.

Technical data

Available voltage versions		Cooling	
Order No.	9 421 852	Cooling of compressor	2-stage Water
Available voltage versions:		Cooling water pressure max. bar	6
9421852.07	400V/3PNPE/50Hz (Plug 32A CEE) (R507)	Max. heat dissipated by unit into cooling water kW	7
9421852.S1.07	400V/3PNPE/50Hz (Plug 32A CEE) (R449A)	Recommended cooling water properties	
9421852.16	208-230V/3PPE/60Hz (Without Plug) (R507)	Cooling water temperature range °C	10 ... 15
9421852.06	230V/3PPE/50Hz (Plug 63A CEE) (R507)	Cooling water difference pressure bar	1.5 ... 6
		Cooling water consumption l/min ²	6
		Permissible cooling water properties	

Cooling water temperature range °C	5 ... 35
Cooling water difference pressure bar ³	0.5 ... 6

² Cooling water consumption may vary outside recommended cooling water properties.

³ At cooling water temperatures of 25 °C and higher, the minimum differential pressure is 1 bar.

Other	
Sound pressure level dbA	69
Classification	Classification III (FL)
IP Code	IP 21
Pump type	Centrifugal Pump
Pump type Magnetically coupled	1

Electronics	
Interfaces	Alarm output, Ethernet, Modbus, Profibus optional, REG/EPROG optional, RS232, RS485 optional, SD memory card, Standby-Input optional, USB
External pt100 sensor connection	integrated
2nd external Pt100 sensor connection	accessory
Integrated programmer	8x60 steps
Temperature control	ICC
Absolute temperature calibration	3 Point Calibration
Temperature display	5.7" TFT Touchscreen
Temperature setting	Touchscreen

Dimensions and volumes	
Internal usable expansion volume l	7
Minimal process volume l	9.5
Active heat exchanger volume l	5
Weight kg	335
Cooling Water Connection in	G¾
Dimensions cm (W x L x H)	61 x 84.5 x 125
Pump connections	M30x1.5 male

Temperature values	
Setting the resolution of the temperature display °C	0.01
Working temperature range °C	-85 ... +250
Temperature stability °C	±0.05 ... ±0.1
Ambient temperature °C	+5 ... +40
Setting the resolution of the temperature display °C	0.01

All Benefits



Touch display. Perfect operation.
With the touch display, the user always has an overview of all values and functions. The intuitive and multilingual menu structure enables perfect control.



Convenience for several users
Administrator level for customizing instrument settings, user levels with limited permissions for fast and safe defined access, password protection, all levels adjustable



100 % Cooling capacity
'Active Cooling Control' for cooling available throughout the entire working temperature range, fast cool-down even at higher temperatures



Intelligent temperature control.
Intelligent cascade control - automatic and self-optimizing adaptation of the PID control parameters with external stability of +/- 0.05 °C.



Full control
'Temperature Control Features', for individual optimization, access to all important control parameters, additional settings for band limit, limits, co-speedfactor etc.



Control of the external application
External Pt100 sensor connection for precise measurement and control directly in the external application



Highest measuring accuracy
 'Absolute Temperature Calibration' for manual compensation of a temperature difference, 3-point calibration



Intelligent pump system
 Reliable and consistent pump capacity, electronically adjustable pump stages or pressure value, automatic adjustment of pump capacity to viscosity



Many interfaces.
 Straight-forward remote control, data management, and integration into process structures. USB, Ethernet, RS232, SD card, and alarm off are permanently integrated. Further interfaces available as accessories.



Space-saving footprint
 All connections as well supply and exhaust air are located at the front or rear, no venting grids on the sides, units can be placed close to each other or the application



Continuous operation up to +40 °C
 Robust temperature control instrument, continuous operation even at ambient temperatures of up to +40 °C



Maximum safety.
 Classification III according to DIN12876-1 enables safe operation, even with flammable fluids. Automatic switch-off in the event of high temperature or low liquid level.



Duplicate safety
 Adjustable high temperature cut-off for internal tank and for integrated expansion vessel



For flammable bath fluid
 Classification III (FL) according to DIN 12876-1



Quick support
 If an error occurs, the integrated Black-Box function permits fast diagnosis by the JULABO service team



100% Checked.
 100% testing. 100% quality. Each JULABO Circulator undergoes thorough quality testing before leaving the factory.




Green technology.
 Development consistently applied environmentally friendly materials and technologies.



JULABO. Quality.
 Highest standards of quality for a long product life.



Quick start.
 Individual JULABO consultation and comprehensive manuals at your disposal.



Satisfied customers.
 11 subsidiaries and more than 100 partners worldwide guarantee fast and qualified JULABO support.



Services 24/7.
 Around the clock availability. You can find suitable accessories, data sheets, manuals, case studies, and more at www.julabo.com.