

CORIO CP-1201F Refrigerated / heating circulator

Refrigerated circulators from the CORIO CP range are suitable for applications with a temperature range up to +100°C. The enhanced pump performance ensures they are suitable for easy temperature control tasks in combination with external applications.

The CORIO CP-1201F refrigerated circulator is exceptionally versatile with a bath opening of 35 x 41 cm (width x depth) and a bath depth of 30 cm. The resulting bath volume of 50 liters makes it possible to control the temperature of large objects, or many smaller objects, directly in the bath.


This cooling machine uses natural, environmentally-friendly refrigerant and was developed with a focus on energy efficiency. This means significant savings of up to 70% with respect to the operating costs for numerous applications, which also means faster amortization of the procurement cost. At the same time, the lower energy consumption positively contributes to climate protection.



Product features

- Models for internal and external applications
- Bright, white, easy to read display
- Very quiet
- powerful and infinitely adjustable pressure pump
- USB connection
- RS232 interface for online communication
- Bath lid and drain tap included
- removable ventilation grid
- Refrigeration unit without side vents
- Class III (FL) according to DIN 12876-1
- easy switching between internal and external circulation
- Integrated pump connection M16×1
- Space-saving cooling coil design yields more usable space in the bath tank
- early warning system for low liquid level

Pump capacity

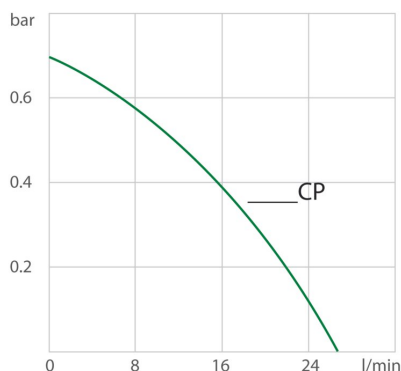

Medium: Water

Technical data

Available voltage versions		Cooling	
Order No.	9 013 718	Cooling of compressor	1-stage Air
Available voltage versions:			
9013718.N1.04	200-230V/50-60Hz (UK Plug Type BS1363A) (R1270)		
9013718.N1.05	200-230V/50-60Hz (CH Plug Type SEV 1011) (R1270)		
9013718.N1.33	200-230V/50-60Hz (Schuko Plug - CEE 7/4 Plug Type F) (R1270)		
9013718.N1.33.chn	200-230V/50-60Hz (CN Plug) (R1270)		
9013718.N1.22	100-115V/50-60Hz (Nema N6-20 Plug) (R1270)		
Bath		Other	
Bath tank	Stainless steel	Classification	Classification III (FL)
Bath cover	integrated	IP Code	IP 21
Usable bath opening cm (W x L / D)	35 x 40 / 30	Pump function	Pressure Pump
		Pump type	Immersion Pump
Electronics		Dimensions and volumes	
Interfaces	RS232, USB	Weight kg	68
Temperature control	PID1	Barbed fittings inner diameter mm	8/12 mm
Absolute temperature calibration	3 Point Calibration	Dimensions cm (W x L x H)	45 x 64 x 95
Temperature display	LED	Filling volume l	48 ... 56
Temperature setting	Keypad	Pump connections	M16x1 male
Electronic Timer h:min	0 ... 999		
Temperature values		Included in delivery	
Setting the resolution of the temperature display °C	0.1	2 Barbed fittings for tubing 8 and 12 mm ID. (Pump connections M16x1 male)	
Working temperature range °C	-40 ... +100		
Temperature stability °C	±0.03		
Ambient temperature °C	+5 ... +40		
Temperature display resolution °C	0.01 ... 0.1		

All Benefits



Brilliant.

Very bright display makes it easy to read even from a distance.



Switch on. And off you go.

Intelligent operating concept. Ready for operation with just a few quick and easy steps.



Timer. Integrated.

CORIO circulators include an integrated timer function. When the set time has elapsed, a signal sounds and the device switches off. Setting range: 0 ... 999 minutes.



Everything at the front.

All operating controls and safety functions are accessed easily and comfortably from the front.



Exact.
You can rely on it. PID1 control and 'Active Cooling Control' make the new CORIO precise and perfect.



Locked in.
The lockable power plug guarantees safe connection. More process safety.



Connection. Easy.
Inclined pump connections (M16x1) facilitate the connection of applications. Each unit includes 2 barbed fittings of 8/12 mm diameter each.



Powerful. Adjustable.
Strong pressure pump, continuously adjustable.



Early warning system for low liquid level.
Maximum safety for your application. Optical and audible alarm allows user to refill bath fluid in time.



Connectivity.
Remote control made easy. CORIO CP circulators feature a USB connection and RS232 interface.